

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 309 135 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
07.05.2003 Bulletin 2003/19

(51) Int Cl.7: H04L 12/56, H04L 29/12,  
H04L 29/06

(21) Application number: 01440368.7

(22) Date of filing: 30.10.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

- Cosson, Laurent  
F-91630 Marolles en Hurepoix (FR)
- Rombeaut, Jean-Pierre  
F-59600 Maubeuge (FR)
- Saintillan, Yves  
F-91300 Massy (FR)

(71) Applicant: ALCATEL  
75008 Paris (FR)

(74) Representative:  
Menziotti, Domenico, Dipl.-Ing et al  
Alcatel  
Intellectual Property Department, Stuttgart  
70430 Stuttgart (DE)

(72) Inventors:  
• Giraud, Alain  
F-91430 Igny (FR)

## (54) Forwarding of IP packets for routing protocols

(57) A forwarding engine of a router device may replace addresses of some IP packets by virtual ones such to mask the active routing daemon. This is used in unicast regime when said forwarding engine forwards incoming IP packets from neighbor routers to said routing daemon. It is also used in unicast as well as in multicast regime in the opposite case. A standby routing daemon may also be used on another processor by af-

fecting same virtual addresses for its ports as the first active routing daemon. In a case of failure of the first active routing daemon, a controller will switch said standby routing daemon to be the new active daemon connected to the forwarding engine. A CompactPCI (Peripheral Component Interconnect) bus can be advantageously used. In that case, the forwarding engine is a peripheral board of the controller of that CompactPCI.

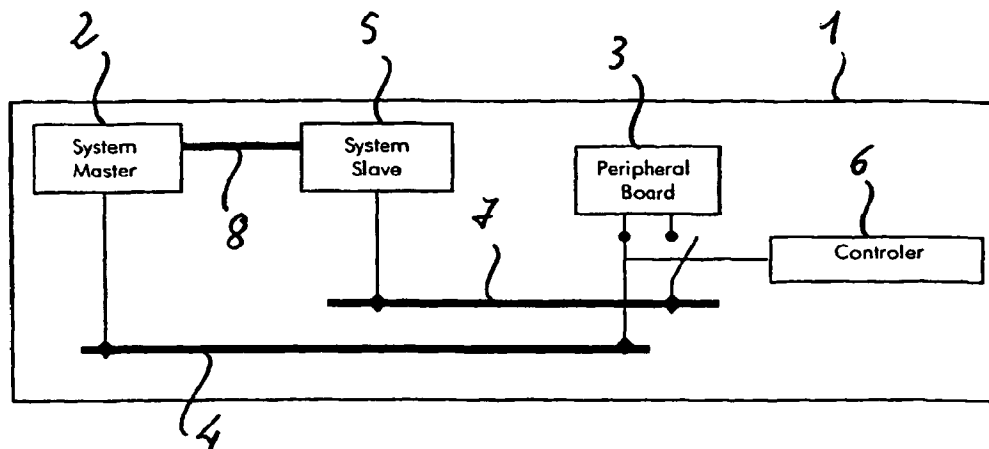


Figure 1

EP 1 309 135 A1

## Description

**[0001]** The present invention relates to the continuity service of Internet Protocol IP routing. More specifically, the invention provides a router device for IP routing as set forth in the preamble of claim 1, and a method for forwarding incoming as well as outgoing IP packets from respectively neighbor routers to some active routing daemon and vice versa.

**[0002]** A router device or router - a level three IP packet switch formerly called a gateway in the literature - contains a plurality of connections with other routers. These connections can be of different natures depending of the used protocol e.g. a point to point or a multi-access one, latter being used for an Ethernet based network. The use of a protocol like OSPF (Open Shortest Path First) protocol which is a TCP/IP (Transmission Control Protocol over Internet Protocol) will permit to the routers to get enough information about the network for a successful forwarding of the received packets. The routing when using e.g. OSPF protocol will be dynamical i.e. a change in the topology of the network will be taken into account in a dynamic way. It implies that some exchange of information must be performed regularly between the routers so to update a database of each router concerning information of an actual status of the network.

**[0003]** It may be necessary according to the type of the connection and the used routing protocol to build a so-called adjacency process between several different routers. In that case, routers that become adjacent will have some information concerning the state of the network so to be able to forward any incoming packets. These information are organized in a routing table. And due to the dynamical mode, these routing tables must be updated regularly. But to optimize the traffic of packets, such adjacency process may be done only between a router and a designated neighbor router. The updates are performed via exchange of messages called Link State Advertisement LSA containing some information about the network. The routing tables are then calculated by each router using that information.

**[0004]** A lot of applications must be highly available. But due to potential hardware or software failures, desktop systems like routers are not, strictly speaking highly available. A way to improve the situation is to use a clustering model i.e. use a group of redundant and autonomous server platforms including routers in a networked configuration. In that case, if one autonomous platform fails, a standby platform will take its place. But such model has the big drawback that a takeover time is of the order of 30 to 90 seconds. During that takeover time, all packets will be lost which is an unsatisfactory situation for many application.

**[0005]** In US5,473,599 and in the documentation to be found on the 15<sup>th</sup> of October 2001 under [http://www.cisco.com/univercd/cc/td/doc/product/lan/cat6000/sft\\_6\\_1/configgd/redund.htm](http://www.cisco.com/univercd/cc/td/doc/product/lan/cat6000/sft_6_1/configgd/redund.htm) are explained an alternative to guarantee high availability using Hot

Standby Router Protocol HSRP. In that case, a system database is maintained on an active supervisor engine (in our case a router) and updates are sent to a standby supervisor engine (an adjacent router) for any change of data in the system database. The active supervisor engine communicates and updates the standby supervisor engine when any state changes occur, ensuring that the standby supervisor engine knows the current protocol state of supported features. A synchronization of each database, among other the routing tables, must be performed. The standby supervisor engine is isolated from the system bus and does not switch packets. But it does receive packets from the switching bus to learn and populate the routing table. The standby supervisor engine does not participate in forwarding any packets and does not communicate with any modules.

**[0006]** When using HSRP, it may be convenient to use also Virtual Router Redundancy Protocol VRRP as discussed at the IETF and to be found on the 15<sup>th</sup> of October 2001 under <http://www.ietf.org/html.charters/vrrp-charter.html>. In that case, each element of the network in an HSRP group will share a virtual IP address and MAC (media access control) address. In other words, several routers on a LAN (Local Area Network) on a multi-access link will be able to use the same virtual IP address. One router will be elected as a master with the other routers acting as backups in case of the failure of the master router. The master will forward packets sent to these IP addresses. The election process provides dynamic fail over in the forwarding responsibility should the master become unavailable. This allows any of the virtual router IP addresses on the LAN to be used as the default first hop router by end-hosts. The advantage gained from using VRRP is a higher availability default path without requiring configuration of dynamic routing or router discovery protocols on every end-host. But it is based on the use of different routers on a LAN i.e. at least two, one for the master and one for the backup, and each of these routers being independent server platform, a very costly engine.

**[0007]** It is an object of the present invention to provide high availability of routing of IP packets at the lowest possible cost.

**[0008]** This object is attained by a router device as claimed in claim 1 and a method for forwarding IP packets as claimed in claim 8.

**[0009]** It is advantageously taken profit of the possibility when using a forwarding engine physically separated from the active routing daemon to let that forwarding engine replacing addresses of some IP packets by virtual ones such to mask the real routing daemon. This is of particularly importance when the router device has several outgoing ports. It is then used in unicast regime when said forwarding engine forwards incoming IP packets from neighbor routers to said routing daemon. It is also used in unicast as well as in multicast regime when said forwarding engine forwards outgoing IP packets from said routing daemon to neighbor routers.

[0010] In another embodiment, a standby routing daemon is advantageously used on another processor by affecting same virtual addresses for its ports as the first active routing daemon. In a case of failure of the first active routing daemon, a controller will then switch said standby routing daemon to be the new active daemon connected to the forwarding engine.

[0011] In a further embodiment, it is taken advantage of the use of a CompactPCI (Peripheral Component Interconnect) bus. In that case, the forwarding engine is a peripheral board of the controller of the CompactPCI. And the processors on which the routing daemon are running are directly connected to that CompactPCI bus.

[0012] Further advantageous features of the invention are defined in the dependent claims and will become apparent from the following description and the drawings.

[0013] One embodiment of the invention will now be explained in more details with reference to the accompanying drawings, in which:

Fig. 1 is a schematic view of an hardware architecture according to the invention;

Fig. 2 is a schematic view of control packets flows.

[0014] On figure 1 is depicted a router device 1 usually with several outgoing (Input/Output) ports and connected to some network for forwarding IP packets. Such router device 1 contains a processor board 2 on which is running an active routing daemon - system master. This processor board 2 is directly connected through some bus 4 to a forwarding engine 3 - peripheral board.

[0015] The forwarding engine 3 is set such that it forwards incoming IP packets from neighbor routers to said active routing daemon or outgoing IP packets from said active routing daemon to neighbor routers. This can occur mainly in two different modes i.e. in unicast or multicast, latter encompassing broadcast mode. In the later protocol IPv6, it exists also anycast mode which is encompassed in the present invention by unicast. Unicast mode means that a communication occurs via a point-to-point communication. Anycast refers to the ability of a device to establish a communication with the closest member of a group of devices, in our cases routers of a network. By way of example, a host might establish a communication with the closest member of a group of routers for purposes of updating a database like a routing table. That router would then assume responsibility for retransmitting that update to all members of the router group on the basis of a multicast. More generally, multicast mode is the case when a broadcasting of messages is performed to a selected group of devices on a LAN, WAN or the Internet. It is a communication between a single device and multiple members of a device group.

[0016] According to the present invention, the forwarding engine 3 when forwarding incoming IP packets from neighbor routers to the routing daemon - system

master -, will replace in unicast regime destination addresses of its outgoing ports in IP packets with virtual one of said active routing daemon. And when forwarding outgoing IP packets from said routing daemon to neighbor routers, will replace in unicast as well as multicast regimes, virtual source addresses of said active routing daemon in IP packets with the addresses of its outgoing ports.

[0017] Usually, the addresses which are of concern in the present invention - not exclusively - are the IP addresses and/or the MAC (media access control) addresses. An IP address is a network layer address for a device operating in the IP suite of protocols. The IP address is typically a 32 bit field or even 128 bit under IPv6, at least a portion of which contains information corresponding to its particular network segment. A MAC address is an address of a device at the sublayer of the data link layer. It is generally intended to apply to a specific physical device no matter where it is plugged into the network. Thus, a MAC address is generally hard-coded into the device - on a router's ROM, for example. In the present case, the addresses which are replaced by the forwarding engine (3) will be preferably the IP- and/or MAC addresses.

[0018] In figure 1 is furthermore pictured the router device 1 with a second processor board 5 - system slave - on which is running a standby routing daemon. The second processor board 5 is firstly connected to the processor board 2 via a specific bus connection 8. All the updates of the database will occur through such bus connection 8, particularly the routing table allowing in case of necessity a very fast takeover of the standby routing daemon to become the new active routing daemon. This takeover is performed by a controller 6 which is connected with the bus 4 as well as a specific bus 7 directly connected with the second processor board 5. In case of a failure of the active routing daemon, the controller 6 will switch the standby routing daemon to be the new active daemon connected then via its specific bus 7 to the forwarding engine 3. The previously active daemon may then become the new standby routing daemon if the failure was not irreversible. If necessary, the previously older active daemon can be disconnected from the forwarding engine 3 by the controller 6 almost at the same time as the standby daemon is connected to the forwarding engine 3. In any case, the takeover will take only few ms which has to be compared with the 30 to 90 s in previous cases, it means almost no lost of packets to be forward will be noticed.

[0019] Instead of using two different routers for the active as well as the standby supervisor engine, it may be of interest to use two different system boards of the same CompactPCI (Peripheral Component Interconnect). This will substantially lower the price of such architecture. In that case, the two processor boards 2 and 5 on figure 1 are two system boards of this CompactPCI, the controller 6 is the controller of this CompactPCI and the forwarding engine 3 is a peripheral forwarding of that

controller 6. An Ethernet over CompactPCI driver may be used to communicate between the two different boards 2, 5 using the bus 8. This driver may affect automatically MAC address to each system board, particularly, it can affect the same MAC address. Moreover, it is possible to set the IP addresses of the two system boards to the same value.

**[0020]** In figure 2 are shown four different situations of control of packets flow according to the present invention. The peripheral board is the forwarding engine 3 with two real physical outgoing ports, and the system master is the active routing daemon with one real physical outgoing port. Furthermore, some virtual interfaces are created on the processor boards 2, 5 of the system master to simulate the real outgoing interfaces (Input/Output) of the forwarding engine 3. Here, two virtual interfaces of the system master are depicted to match the number of the real outgoing ports of the forwarding engine 3. But the number of real ports is only indicative and can be more than two. The routing protocol daemon can then be run with only few minor modifications. A packet analyzer software running on the peripheral board (forwarding engine 3) will be used to forward and mask the control packets for routing protocols such to redirect the packets in order to let the external networks and routing protocol daemon from neighbor routers believing that the packets are located on the peripheral board.

**[0021]** In the cases a and b are depicted the situations for incoming IP packets from neighbor routers to the active routing daemon. In unicast regime - a - the forwarding engine 3 forwards incoming packets to the virtual interface of the system master by modifying the IP and MAC addresses to match the one of the processor board target interface of the system master. In multicast regime - b - the forwarding of the incoming packets to the real interface of the system master occurs without any change of addresses.

**[0022]** In the cases c and d are depicted the situations for outgoing IP packets from the active routing daemon to neighbor routers. This time, in both regimes unicast as well as multicast one, respectively case c and d, the forwarding of packets to the outgoing interface of the peripheral board (forwarding engine 3) will take place by matching with the virtual interface where the packet is coming from. For that, the IP as well as the MAC addresses are modified to match with the outgoing interfaces.

**[0023]** The use of such method where destination addresses IP packets to be forward may be replaced allows to have a redundant routing daemon running on a separate board acting as a standby one. This is achieved with a minimal intrusion in the routing protocol code. In such a way, it is possible in case of failure to restart routing protocols i.e. switch from active routing daemon to the standby routing daemon without warning neighbor routers.

## Claims

1. Router device (1) for IP (internet protocol) routing having an active routing daemon running on a processor board (2) connected to a forwarding engine (3) containing at least two outgoing ports and forwarding incoming IP packets from neighbor routers to said routing daemon or outgoing IP packets from said routing daemon to neighbor routers **characterized in, that** said forwarding engine (3) when forwarding said incoming IP packets replaces in unicast regime destination addresses of its outgoing ports in IP packets with virtual one of said active routing daemon and when forwarding said outgoing IP packets replaces in unicast as well as multicast regimes virtual source addresses of said active routing daemon in IP packets with the addresses of its outgoing ports.
2. Router device (1) according to claim 1 **characterized in, that** the replaced addresses are the IP- and/or the MAC (media access control)-addresses.
3. Router device (1) according to claim 1 **characterized in, that** said processor board (2) is interconnected with neighbor routers via a compactPCI (peripheral component interconnect) bus while said forwarding engine (3) is a peripheral board connected to said compactPCI bus.
4. Router device (1) according to claim 1 **characterized in, that** it contains a standby routing daemon running on an another processor board (5) with same affected virtual addresses for its ports as said active routing daemon and a controller (6) which in case of a failure of said active daemon switches said standby routing daemon to be the new active daemon connected to said forwarding engine (3).
5. Router device (1) according to claim 3 **characterized in, that** said active routing daemon and said standby routing daemon are connected with each other through a specific connection (8) for data transfer enabling a synchronization of said active with said standby routing daemon.
6. Router device (1) according to claim 4 **characterized in, that** said connection between said active routing daemon and said standby routing daemon is controlled by a driver on said controller (6) which affects the same addresses to said active as well as standby routing daemon.
7. Router device (1) according to claim 3 **characterized in, that** said controller (6) contains a compact-PCI (peripheral component interconnect) bus and said forwarding engine (3) is a peripheral board of said controller.

8. Method for forwarding incoming IP packets from neighbor routers to some active routing daemon or outgoing IP packets from said active routing daemon to neighbor routers by a forwarding engine (3) containing at least two outgoing ports and connected to some router device (1) for IP routing containing said active routing daemon running on a processor board (2) while when forwarding said incoming IP packets in unicast regime, destination addresses of said outgoing ports in IP packets are replaced by virtual one of said active routing daemon or when forwarding said outgoing IP packets in unicast as well as multicast regimes, virtual source addresses of said active routing daemon in IP packets are replaced with the addresses of said outgoing ports.
9. Method according to claim 8 characterized in, that the replaced addresses are the IP- and/or the MAC (media access control)-addresses.
10. Method according to claim 8 characterized in, that in case of a failure of said active daemon a switch occurs to a standby routing daemon running on another processor board (5) and affected with same affected virtual addresses for its ports as said active routing daemon, while said standby routing daemon being the new active daemon connected to said forwarding engine (3).

30

35

40

45

50

55

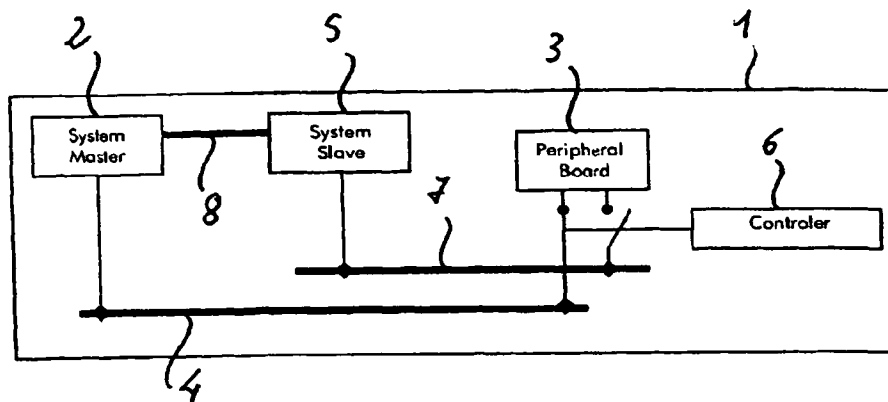


Figure 1

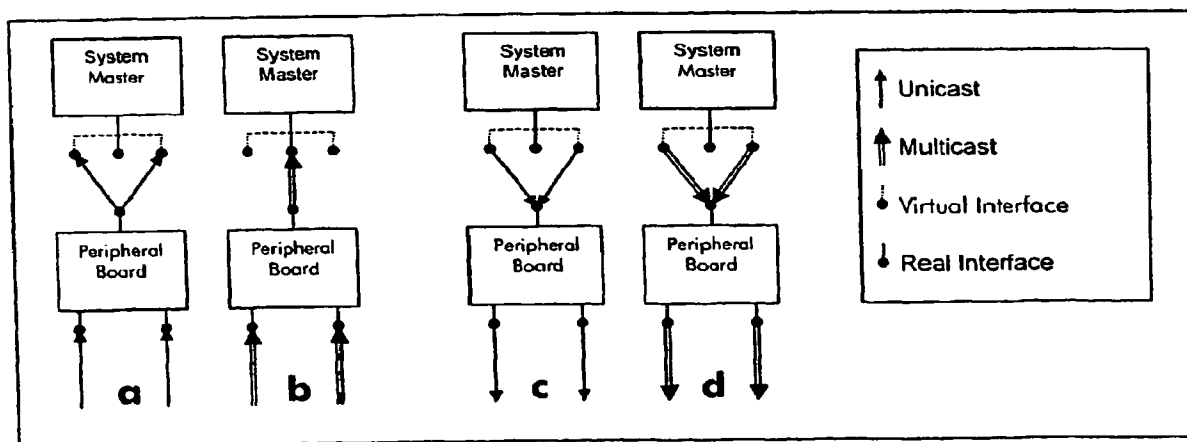


Figure 2



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 44 0368

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 605 339 A (IBM) 6 July 1994 (1994-07-06) * column 7, line 43 - column 8, line 20; figure 2 * * column 11, line 49 - column 12, line 3 * * column 13, line 49 - column 14, line 3 * * column 16, line 28 - column 18, line 18; figures 5B,6 *	1,2,8,9	H04L12/56 H04L29/12 H04L29/06
Y	---	3-7,10	
Y	US 6 049 524 A (TSUKAKOSHI MASATO ET AL) 11 April 2000 (2000-04-11) * column 3, line 56 - column 4, line 18 * * column 5, line 52 - column 6, line 12 * * column 7, line 29 - line 37 * * column 8, line 45 - line 54 *	4-6	
Y	WO 00 51290 A (ALCATEL INTERNETWORKING INC) 31 August 2000 (2000-08-31) * page 5, line 19 - line 37; figure 1 * * page 7, line 27 - page 8, line 3; figure 2 * * page 8, line 20 - page 9, line 9 * * page 24, line 4 - line 8 * * page 35, line 4 - page 36, line 22 *	3,7,10	
A	P. SRISURESH: "Traditional IP Network Address Translator" INTERNET ARTICLE, 'Online! 1 January 2001 (2001-01-01), XP002205497 Retrieved from the Internet: <URL:http://www.ietf.org/rfc/rfc3022.txt?number=3022> 'retrieved on 2002-07-09! * page 3, paragraph 2. - page 5, paragraph 2.1 *	1,2,8,9	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04L
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>12 July 2002</b>	Examiner <b>Perrier, S</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 44 0368

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>ANEYA J: "On the design of IP routers Part 1: Router architectures" JOURNAL OF SYSTEMS ARCHITECTURE, ELSEVIER SCIENCE PUBLISHERS BV., AMSTERDAM, NL, vol. 46, no. 6, April 2000 (2000-04), pages 483-511, XP004190486 ISSN: 1383-7621 * page 506, paragraph 4.5.2 *</p>	4,10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>12 July 2002</b>	Examiner <b>Perrier, S</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 33 82 (Pac01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 44 0368

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-07-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0605339	A	06-07-1994	US	5371852 A	06-12-1994
			DE	69328666 D1	21-06-2000
			DE	69328666 T2	01-02-2001
			EP	0605339 A2	06-07-1994
			JP	2561797 B2	11-12-1996
			JP	6205014 A	22-07-1994
US 6049524	A	11-04-2000	JP	3286584 B2	27-05-2002
			JP	11154979 A	08-06-1999
			US	2002060986 A1	23-05-2002
WO 0051290	A	31-08-2000	AU	4004000 A	14-09-2000
			CN	1341313 T	20-03-2002
			EP	1171976 A2	16-01-2002
			WO	0051290 A2	31-08-2000
			AU	4003700 A	14-09-2000

EPO FORM P0459

For more details about this annex see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**